

The L-handle for the padlock provides an exact height adjustment with its new square threaded rod



01 Requirements

“In order to be able to use the L-Handle for padlock in a more versatile manner and to increase both the flexibility as well as the operating comfort, we have been able to expand the previous properties with a specific benefit.

As of now, we offer a new L-handle for padlock with a square threaded rod. This enables a precise adaptation of the height adjustment of cams with variably adjustable catches for standard cams.”

Andreas Taddey

Director of Production and Logistics, Plant Manager



02 Product benefits

Use in versatile areas

A height adjustment of the cams is enabled with the new L-handle and its square threaded rod. This is performed with catch for standard cams (7-077.01), which enable the readjustment at any time. The padlock eyelet has been fitted outside of the handle area in order to prevent possible vandalism or injuries.

- Square threaded rod for adjustability of standard or 3-point cams
- Large asymmetrical padlock eyelet Ø 11 mm
- Use is possible in both left and right doors by turning the eyelet
- Mounting with carriage bolts Ø 5 mm

Possible variants


- Version a) includes escutcheon with holes for screws 5mm
- Version b) includes escutcheon without holes

Secure and flexible

To also enable the use in exterior areas, the L-handle made of high-grade stainless steel (1.4401) guarantees a high degree of resistance to corrosion, temperature and chemicals. Due to its mirror-polished surface, the handle is particularly easy to clean and dirt-repellent.


- IP65 according to DIN EN 60529
- Resistance to corrosion, temperature and chemicals due to the use of stainless steel

03 Dimensions / Order options

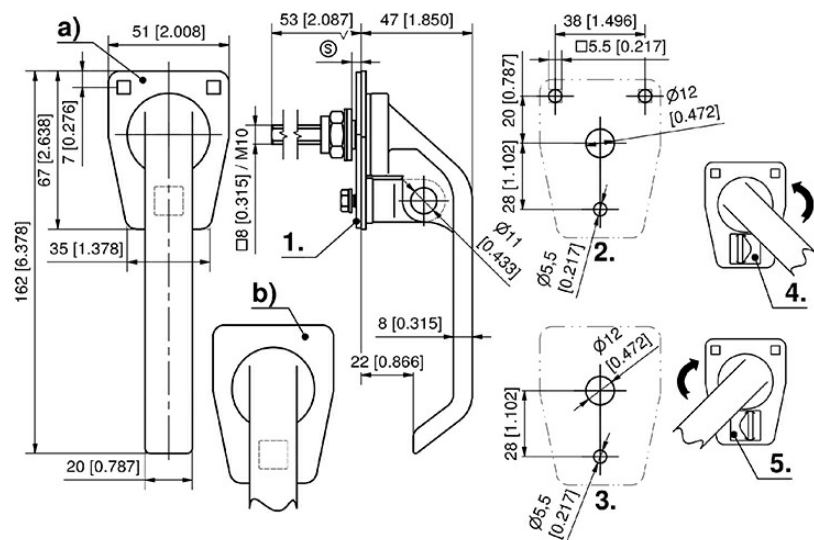

1. Flat seal
2. Cutout version a)
3. Cutout version b)
- 4./5. The padlock eye is asymmetrically. It is used as stop for RH (4.) / LH (5.) applications.

As a result of the asymmetrical construction of the eyelet, the pin is always in the center position in the closed state.

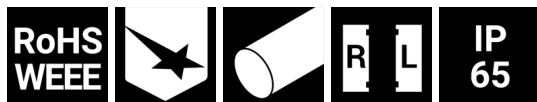

Material



L-Handle, escutcheon, square threaded rod and padlock eye: stainless steel AISI 316

Flat seal: EPDM

Washer: Teflon

Product system	Version	Installation type	Latching type	Part number	Link
7-073.01	with fastening holes	screw-on	padlock	281-9006.00-00000	
7-073.01	without fastening holes	screw-on	padlock	281-9007.00-00000	

Accessories

Product system	Description	Link
7-077.01	Catch for Standard Cams Pr20.1	
7-105	Cams L35/45 Stainless Steel	

Contact



DIRAK GmbH –
A Member of DIRAK Group

DIRAK Dieter Ramsauer
Konstruktionselemente GmbH
Königsfelder Straße 1
58256 Ennepetal
Germany

Phone: +49 (0) 2333 / 837-0

Fax: +49 (0) 2333 / 837-103

Email: info@dirak.de

Imprint

DIRAK Dieter Ramsauer
Konstruktionselemente GmbH
Königsfelder Straße 1
58256 Ennepetal
Germany

Phone: +49 (0) 2333 / 837-0
Fax: +49 (0) 2333 / 837-103
Email: info@dirak.de

Represented by:
Jens Boche

Entered in the trade register
Commercial Register AG Hagen,
HRB 7977
Sales Tax ID Number (VAT No.)
DE 261 585 314
Last update: June 2023